

Off-Grid Inverter

FSA-3~4.2K1P-BL

「3/3.6/4/4.2kW」



Features



Parallel Connection

Parallel connection with up to 9 units



Enhanced Overload Capacity

2 times the rated power for 5 seconds



High-Power Module Compatibility

Higher PV input current up to 18A



Smart Load Management

Dual AC outputs to power loads on demand priority



Seamless Switchover

UPS-level switching time $\leq 4\text{ms}$



Efficient Battery Charge/Discharge

Max. 120A charge current
Max. 137A discharge current



Remote Monitoring


Built-in WiFi module for HaiPower monitoring



Stylish Design

Larger screen with touch keys

Off-grid Solution

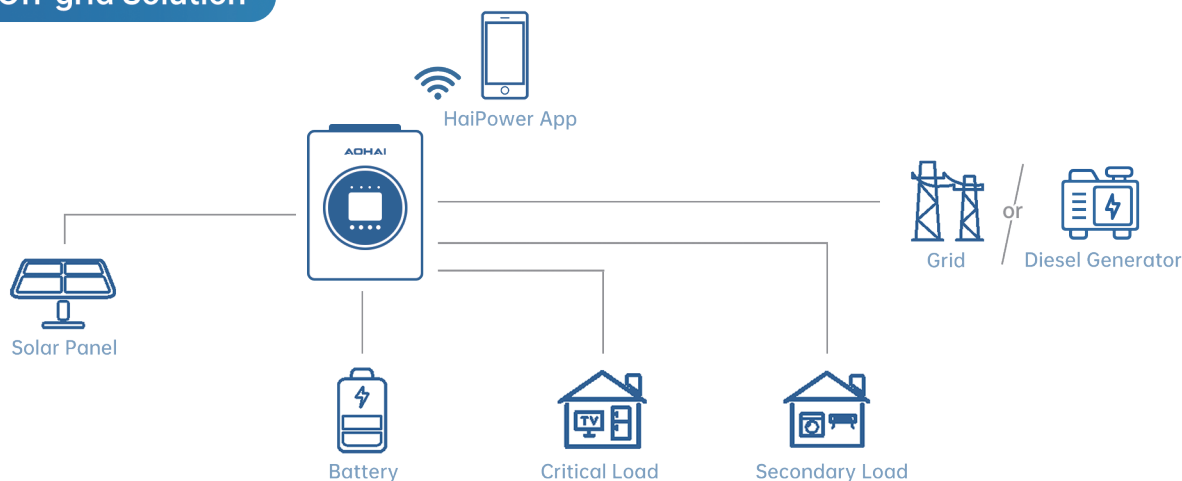

Specifications

Model	FSA-3K1P-BL	FSA-3.6K1P-BL	FSA-4K1P-BL	FSA-4.2K1P-BL
Solar Input Data				
Max. PV Input Power	3300W	3960W	4400W	5200W
Max. Input Voltage	500V			
Start-up Voltage	90V			
MPPT Voltage Range	60V~450V			
Max. Input Current per MPPT	18A			
Max. Short Circuit Current per MPPT	23A			
Number of MPPT	1			
Battery Data				
Battery Type	Li-Ion/Lead-acid			
Nominal Battery Voltage	24V			
Battery Voltage Range	20~30V			
Max. Discharge Current	137A			
Max. Charge/Discharge Power	3000W		3300W	
Li-Ion Battery Activation	Yes			
Li-Ion Battery Communication	CAN/RS485			
Max. Solar Charge Current	120A			
Max. AC Charge Current	100A			
Max. Charge Current (PV+AC)	120A			
AC Input Data(Grid)				
Nominal Input Voltage	230Vac, L/N/PE			
Input Voltage Range	90~280V			
Max. Input Current	25A			
Nominal Input Power	5700W			
AC Frequency Range	50/60Hz(Auto sensing)			
Inverter Output Data				
Nominal Output Power	3000W	3600 with PV&battery 3000W with battery only	4000 with PV&battery 3300W with battery only	4200 with PV&battery 3300W with battery only
Peak Apparent AC Power	6000VA	7200VA	8000VA	8400VA
Nominal AC Voltage	230V			
Nominal Grid Frequency	50/60Hz			
Voltage Waveform	Pure Sine Wave			
Transfer Time(Typ)	4ms			
Nominal Output Current	13.1A	15.7A	17.4A	18.3A
Overload Protection	30s@102%-110% load; 10s@110%-130% load; 5s@130%-200% load			
THDv (@linear load)	<3%			
Efficiency				
Peak Efficiency	94%			
MPPT Efficiency	≥99.9%			
Protect				
DC Surge Protection	Yes			
AC Surge Protection	Yes			
AC Short Circuit Protection	Yes			
System Parameters				
Dimension (W*H*D)	290*424*120mm			
Weight	7.1kg			
Relative Humidity	5%~95% (Non-condensing)			
Operating Temperature Range	-10℃~60℃			
Noise Emission	≤50dB			
Altitude	2000m			
Cooling Method	Fan Cooling			
Ingress Protection	IP20			
Characteristic				
Number of AC Output	2			
Display	LCD&APP			
Communication Interface	RS485/ USB /CAN/ Wi-Fi			
Parallel Capability	9			